





## LED RECESSED DOWNLIGHT SERIES

### TECHNICAL SPECIFICATIONS

CCT	4000K; (2500K/3000K/5000K on request)
CRI	>80Ra
INPUT VOLTAGE	AC200-250V
PF	≥0.94
POWER FREQUENCY	50/60Hz
LIFETIME	L70 > 50,000 hrs.
WORKING TEMPERATURE	-20°C to +40°C
IP GRADE	IP22
LED DRIVER	External driver plug and play, dimmable 1-10V
LED LIGHT SOURCE	
THERMAL MANAGEMENT	Passive
SURFACE FINISH	White
MOUNTING	Recessed
EMERGENCY OPTION	3 hr. available



Code	Power Consumption	CCT	Luminous Flux	Beam angle	Dimension of cut-outs	Exterior dimensions
VER-D125-6-840	6W	4,000K	610 lm	100°	Ø125-145mm	Ø155x54mm
VER-D165-12-840	12W	4,000K	1,100 lm	100°	Ø165-185mm	Ø195x54mm
VER-D205-20-840	20W	4,000K	2,000 lm	100°	Ø205-230mm	Ø245x54mm



#### VERDE LED HQ

VERDE House,  
Wellington Road  
Cork,  
Ireland


T. + 353 - 21 - 486 - 1577  
F. + 353 - 21 - 486 - 1572  
E. [info@verdeled.com](mailto:info@verdeled.com)






## Dimensions (mm)


### VER-D205:

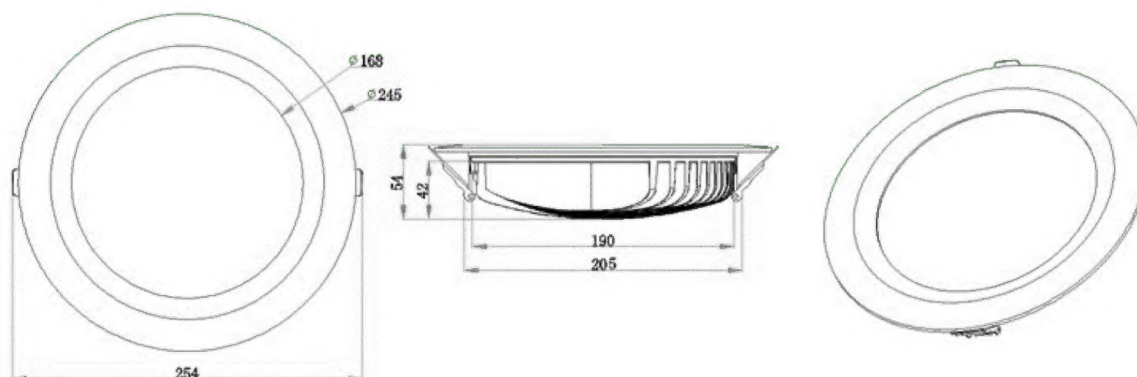

### VER-D165:

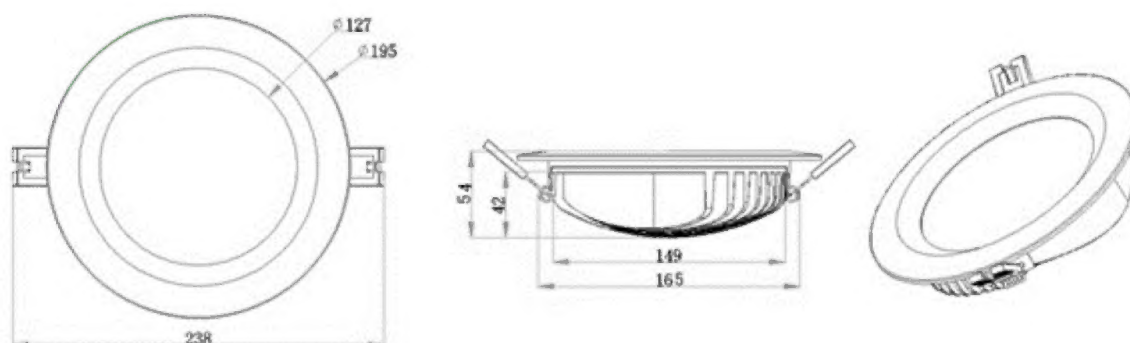

### VER-D125:

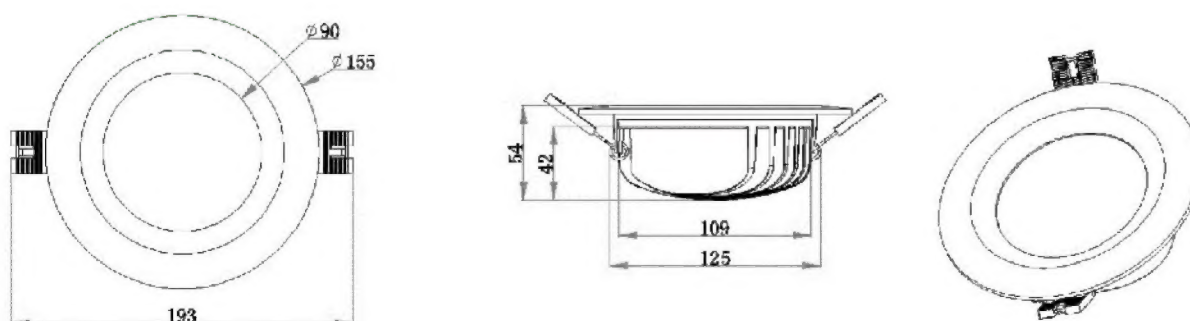

#### VERDE LED HQ

VERDE House,  
Wellington Road  
Cork,  
Ireland

T. + 353 - 21 - 486 - 1577  
F. + 353 - 21 - 486 - 1572  
E. [info@verdeled.com](mailto:info@verdeled.com)

